


TECHNICAL DATASHEET

for

FIBER TERMINATION BOX

16 CORES

(OPF-CWP-16-I4)

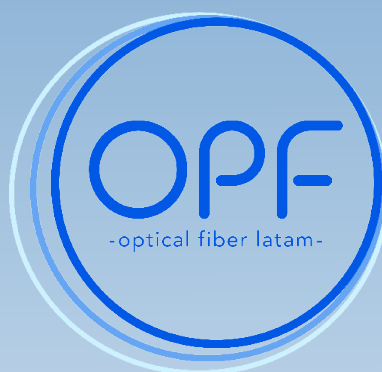

OPFibra OptiClink Group Ltd

+55 (47) 2122-9239 | +55 (47) 99738-0962

Rua Indaial, 424, Sala 3

Itajaí | SC | Brasil

www.opflatam.com

FTTH Drop Cable Type Fiber Optic Splice & Splitter Closure

FTTH Drop Cable Type Fiber Optic Splice & Splitter Closure features with ruggedness, which is tested under harsh conditions and stand up to even the most severe conditions of moisture, vibration and extreme temperatures. Humanized design helps user get better experience and safer operating environment.



Cnt

1. FEATURES

- Dis-mountable adaptor panel
- Support midspan termination
- Easy operation and installation
- Rotatable and dis-mountable splice tray for easy splicing

2. APPLICATIONS

- Wall mounting and pole mounting installation
- Suitable for 2*3mm indoor FTTH Drop Cable and outdoor Figure 8 FTTH Drop Cable (standard) or 6mm cable (optional)

3. CONFIGURATION

Model	OPF-CWP-16		OPF-CWP-24	
Adapter	16pcs of SC		24pcs of SC	
Cable ports	1 uncut port	2 round ports	1 uncut port	2 round ports
Applicable Cable Diameter	10~17.5mm	8~17.5mm	10~17.5mm	8~17.5mm
Drop Cable Ports	16 ports		24 ports	
Applicable Cable Diameter	2*3mm FTTH Drop Cable, 2*5mm Figure 8 FTTH Drop Cable, 6mm cable (optional)			
Dimension	385*245*130mm		385*245*155mm	
Material	Modified polymer plastic			
Sealing structure	Mechanical sealing			
Color	Black			
Maximum Splicing Capacity	48 fibers (4 trays, 12 fibers/tray)			
Applicable Splitter	1pc of 1x16 PLC Splitter or 2pcs of 1x8 PLC Splitters			
Sealing	IP68			
Impact Test	IK10			
Pull Force	100N			
Midspan Entry	yes			
Storage (Tube/Micro Cable)	yes			
Net Weight	4 kg			
Gross Weight	5 kg			
Packing	540*410*375mm (4pcs per carton)			