

FT11301T

Fiber Optic Stripper




Make It Easy



No-damage
to fiber



No residue



Not-cut
the fiber

Product Features

- No fiber damage, no fiber loss and no residue
- Precise tolerances to ensure clean, smooth strips every time.
- Compliant thermoplastic elastomer handle grips.
- 3 hole design provides optimal stripping.
- Removes 250 μm – 3 mm fiber jacket.
- Ergonomically designed reducing the risk of injury.

Safety lock design

Easily retract the jaws when not use

Prevent the autom aticopening of the jaws

Effectively protect the jaws




Safety lock design



Large hole: strip the outer protective layer of 2~3mm fiber



Middle hole: peel off the white soft rubber protective cover of 900 μm ~250 μm

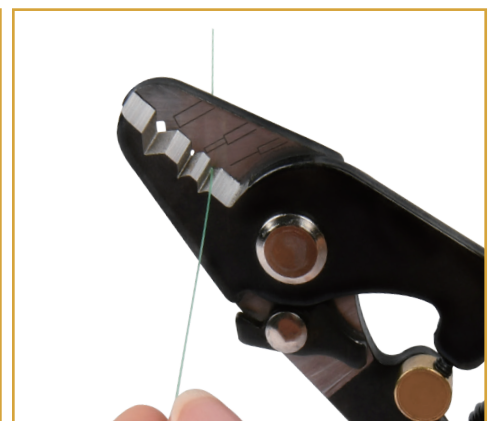

Small hole: strip 250 μm ~125 μm fiber coating

Product Parameter

Brand	TAWAA
Cable Type	FT11301T
range of application	bare fiber, jump fiber
Fiber diameter	125um
Tight Cladding Diameter	250um
Size	16.5cm
Weight	0.13kg
operating temperature	-20~45°C

HEAD OFFICE:
TAWAA TOOLS LIMITED

CONTACT US:
Headquarters address:
China (Jiangsu) Pilot Free Trade Zone Suzhou Area Room 1703,
Shanglv Building, No.381 East of Suzhou Avenue, Industrial Park.
Factory address:
B Building Zhongzhi Science and Technology Park, No.95 Xingangwan
Road, Liuhe Economic Development Zone, Nanjing, Jiangsu, China.

Phone : 0512-87811849
Website : www.tawaa.com
Email : info@tawaa.com



Website