

LiFePO4 BATTERY

XMB-LiFe-12.8/100AH & 200AH

XMB-LiFe es una familia de baterías basadas en celdas de tecnología LiFePO4 diseñada para aplicaciones de descargas profundas cuya intención es poder reemplazar a las baterías de tecnología VRLA y de GEL. Diseñada para cumplir con los estándares de seguridad, rendimiento y calidad mundial más exigentes. Estas baterías vienen equipadas con un grupo de opciones y protecciones muy interesantes. Incluye un BMS por hardware para controlar y proteger la batería. Opcionalmente cuenta con un puerto RS485-USB que permite comunicar con un PC para configurar y controlar la batería, además de un pulsador de ON/OFF y los LEDs para informar sobre el estado de la carga (SOC) de la batería.

La batería, gracias a su BMS interno, implementa sistemas de protección contra: Sobrecargas, Sobredescargas, Sobrecorrientes, Cortocircuitos y temperaturas fuera del rango de operación (alta y baja temperatura).

La tecnología de Ión de Litio LiFePO4 permite operar libre de mantenimiento en temperaturas entre 0 °C hasta +50 °C y soportar más de 3.750 ciclos de carga/descarga profundas 100% (hasta 70% EOL a 25°C. con 0.5C/0.5C). Esta batería cuenta con certificación UN38.3 y CE.




APLICACIONES

Telecomunicaciones



Sistemas Solares

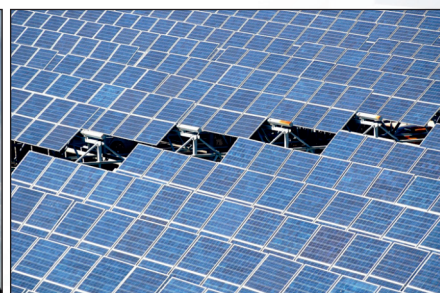

UPS



CARACTERÍSTICAS

- Celdas de larga vida tipo LiFePO4
- BMS y Puerto de Comunicación integrados
- Pulsador ON/OFF y LEDs de SOC
- Sistema de protecciones múltiples
- Permite hasta 4 unidades en serie y hasta 4 sets en serie
- Certificación UN38.3 y CE

VENTAJAS

- Vida Útil: >3500 ciclos (100% DOD 0.5C at 25°C)
- Temperatura (sin calentador):
 - Recarga: 0 to +50°C
 - Descarga: -20 to +55°C
- Tamaño pequeño y ligera
- Caja de Alto Impacto: ABS+PC
- IP65 class (modelos sin puerto USB)

LiFePO4 - MAINTENANCE-FREE BATTERY

12.8V - 100AH (1280Wh)

Xmart
by **Integra**

Model: V0 (Version without communication Options /Versión sin opciones de comunicación)

TECHNICAL SPECIFICATIONS / Especificaciones Técnicas

Nominal Voltage	12.8V	
Nominal Capacity	100AH	
Total Energy	1280Wh	
Dimensions	Lenght:	229 ± 2mm
	Width:	138 ± 2mm
	Container Height:	210 ± 2mm
	Total Height (with terminals):	220 ± 2mm
Approx Weight	Approx. 9.9 Kg (21.8 lbs)	
Terminal	T12 (M8 bolt)	
Container Material	ABS+PC	
Max. Charging Current	100A	
Recommended Charging Current	50A	
Charging Voltage	Bulk Voltage (Max.)	14.2 V
	Floating Voltage	14.2 V
Max. Discharging Current	100A	
End of Discharging Voltage	11.2V DC	
Operating Temperature Range	Discharge:	-20°C to 55°C (-4 to 131°F)
	Recharge:	0°C to 50°C (32 to 122°F)
Storage Temperature	-40°C to +60°C	
	When storing at 25°C: Recharge every year	
	When storing at 40°C: recharge every 3 months	
Humidity	0 to 95% (non condensing)	
Life in Cycles (25°C,0.5C,EOL 70%)	>4000 cycles (90% DOD), >3.750 cycles (100% DOD)	
Life span	> 10 years	



APPLICATIONS / Aplicaciones

Telecommunications
Solar Systems
Wind Power Systems
Engine Starting
Wheelchairs
Floor cleaning machines
Gold trolley
Boats


BMS: Battery Management System

BMS	Hardware BMS integrated
	Bluetooth internal module: Not supported in V0
Human Interface	RJ45-USB communication port: Not supported in V0
	ON/OFF push button: Not supported in V0
Protections	LED: Not supported in V0
	Over-charge, Over-discharge, Over-current, Short-circuit
Connection Capabilities	High-temperature, Low-temperature
	Up to 4 sets in parallel
	Up to 4 units in series


CERTIFICATIONS

IP Class	IP65
Safety	UN38.3 & CE

TERMINAL T12 / Terminal T12



DIMENSIONS / Dimensiones

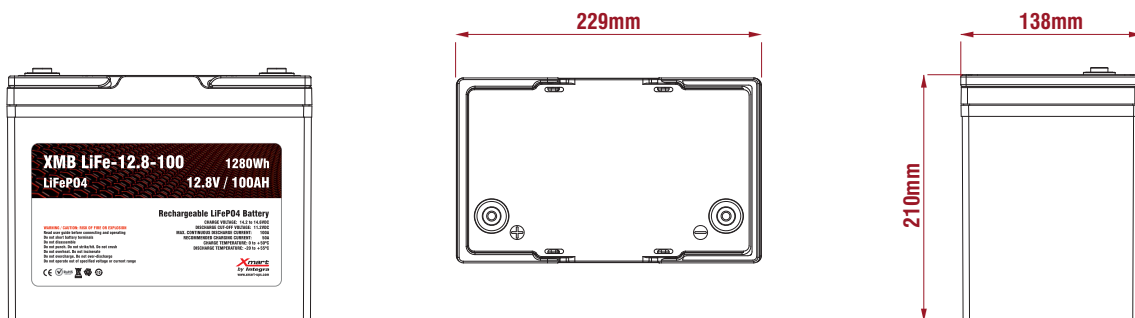

LIFEP04 P2

LiFePO4 - MAINTENANCE-FREE BATTERY

12.8V - 100AH (1280Wh)

Xmart
by Integra

Model: V1 (Version with all communication options / Versión con todas las opciones de comunicación)

TECHNICAL SPECIFICATIONS / Especificaciones Técnicas

Nominal Voltage	12.8V	
Nominal Capacity	100AH	
Total Energy	1280Wh	
Dimensions	Lenght:	260 ± 2mm
	Width:	168 ± 2mm
	Container Height:	210 ± 2mm
	Total Height (with terminals):	220 ± 2mm
Approx Weight	Approx. 10 Kg (22 lbs)	
Terminal	T12 (M8 bolt)	
Container Material	ABS+PC	
Max. Charging Current	100A	
Recommended Charging Current	50A	
Charging Voltage	Bulk Voltage (Max.)	14.2 V
	Floating Voltage	14.2 V
Max. Discharging Current	100A	
End of Discharging Voltage	11.2V DC	
Operating Temperature Range	Discharge:	-20°C to 55°C (-4 to 131°F)
	Recharge:	0°C to 50°C (32 to 122°F)
Storage Temperature	-40°C to +60°C	
	When storing at 25°C: Recharge every year	
	When storing at 40°C: recharge every 3 months	
Humidity	0 to 95% (non condensing)	
Life in Cycles (25°C,0.5C,EOL 70%)	>4000 cycles (90% DOD), >3.750 cycles (100% DOD)	
Life span	> 10 years	



APPLICATIONS / Aplicaciones

Telecommunications
Solar Systems
Wind Power Systems
Engine Starting
Wheelchairs
Floor cleaning machines
Gold trolley
Boats


BMS: Battery Management System

BMS	Hardware BMS integrated
	Supports bluetooth internal module (model V1)
	Supports RJ45-USB communication port (model V1)
Human Interface	ON/OFF push button LED: Battery Level (25%/50%/75%/100%); ON/OFF; ALARM
Protections	Over-charge, Over-discharge, Over-current, Short-circuit High-temperature, Low-temperature
Connection Capabilities	Up to 4 sets in parallel
	Up to 4 units in series


CERTIFICATIONS

IP Class	IP65 for non communication port model IP30 for communication port (model V1)
Safety	UN38.3 & CE

TERMINAL T12 / Terminal T12



DIMENSIONS / Dimensiones

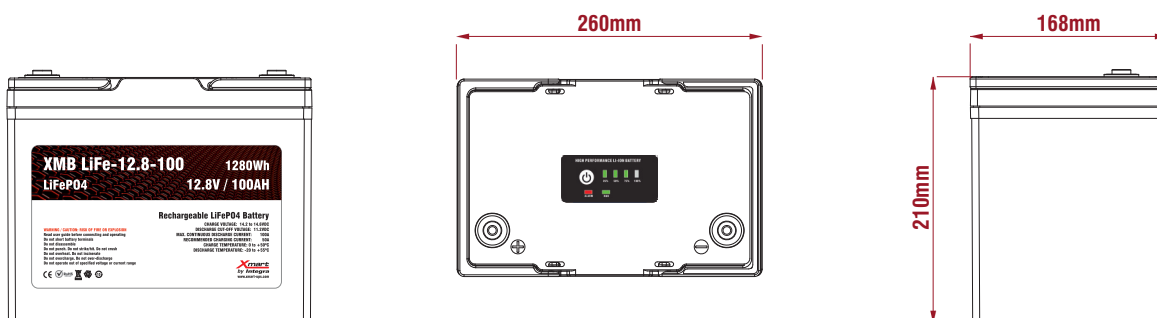

LIFEPO4 P3

LiFePO4 - MAINTENANCE-FREE BATTERY

12.8V - 200AH (2560Wh)

Xmart
by Integra

Model: V1 (Version with all communication options / Versión con todas las opciones de comunicación)

TECHNICAL SPECIFICATIONS / Especificaciones Técnicas

Nominal Voltage	12.8V	
Nominal Capacity	200AH	
Total Energy	2560Wh	
Dimensions	Lenght:	522 ± 2mm
	Width:	240 ± 2mm
	Container Height:	219 ± 2mm
	Total Height (with terminals):	224 ± 2mm
Approx Weight	Approx. 20.5 Kg (45 lbs)	
Terminal	T12 (M8 bolt)	
Container Material	ABS+PC	
Max. Charging Current	200A	
Recommended Charging Current	100A	
Charging Voltage	Bulk Voltage (Max.)	14.2 V
	Floating Voltage	14.2 V
Max. Discharging Current	200A	
End of Discharging Voltage	11.2V DC	
Operating Temperature Range	Discharge:	-20°C to 55°C (-4 to 131°F)
	Recharge:	0°C to 50°C (32 to 122°F)
Storage Temperature	-40°C to +60°C	
	When storing at 25°C: Recharge every year	
	When storing at 40°C: recharge every 3 months	
Humidity	0 to 95% (non condensing)	
Life in Cycles (25°C,0.5C,EOL 70%)	>4000 cycles (90% DOD), >3.750 cycles (100% DOD)	
Life span	> 10 years	



APPLICATIONS / Aplicaciones

Telecommunications
Solar Systems
Wind Power Systems
Engine Starting
Wheelchairs
Floor cleaning machines
Gold trolley
Boats


BMS: Battery Management System

BMS	Hardware BMS integrated
	Supports bluetooth internal module (model V1)
Human Interface	Supports RJ45-USB communication port (model V1)
	ON/OFF push button
Protections	LED: Battery Level (25%/50%/75%/100%); ON/OFF; ALARM
	Over-charge, Over-discharge, Over-current, Short-circuit
Connection Capabilities	High-temperature, Low-temperature
	Up to 4 sets in parallel
	Up to 4 units in series


CERTIFICATIONS

IP Class	IP65 for non communication port model
	IP30 for communication port (model V1)
Safety	UN38.3 & CE

TERMINAL T12 / Terminal T12



DIMENSIONS / Dimensiones

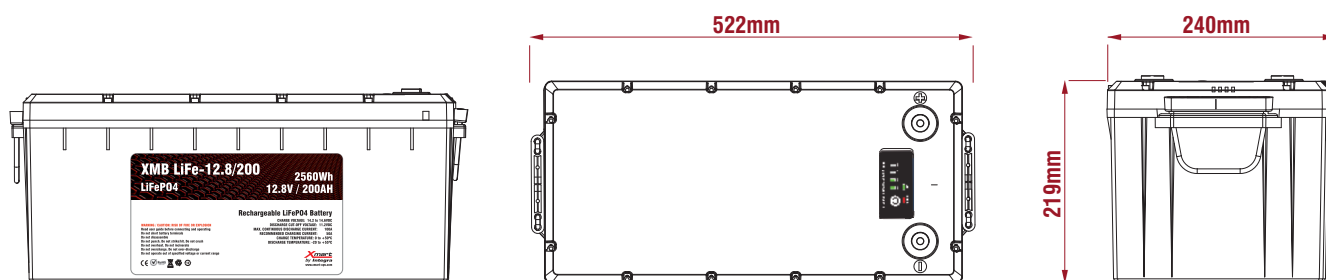

LIFEP04 P4


LiFePO₄ - MAINTENANCE-FREE BATTERY

12.8V - 100AH (1280Wh) & 200AH (2560Wh)




CHARGING & DISCHARGING INFORMATION / Información de carga y descarga


Charging Voltage / Tensión de Recarga (25°C / 0.2C)

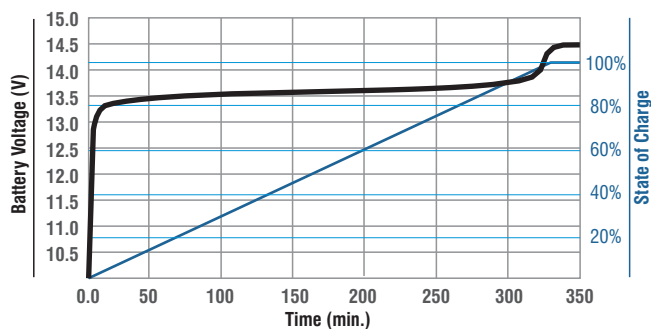


Recharging Time / Tiempo de recarga

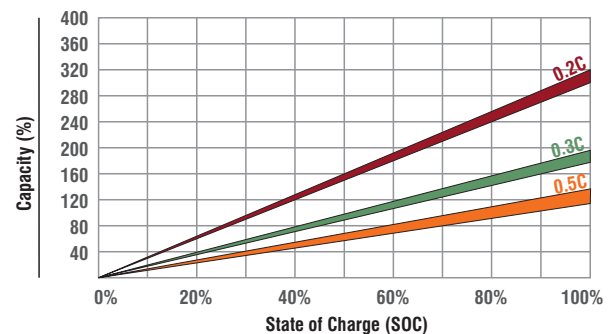


Discharging / Descarga (vs discharge rates @ 25°C)

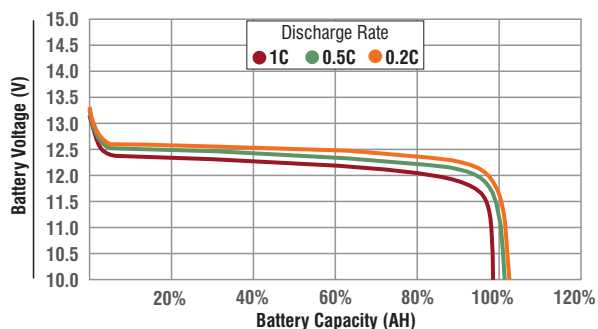


Capacity vs Temperature / Capacidad vs Temperatura

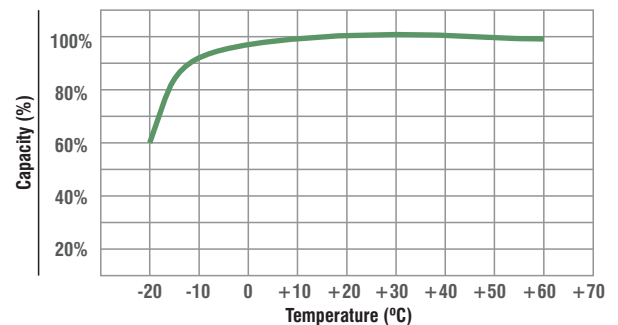

Lifespan in Cycles / Ciclos de carga-descarga (vs DOD)

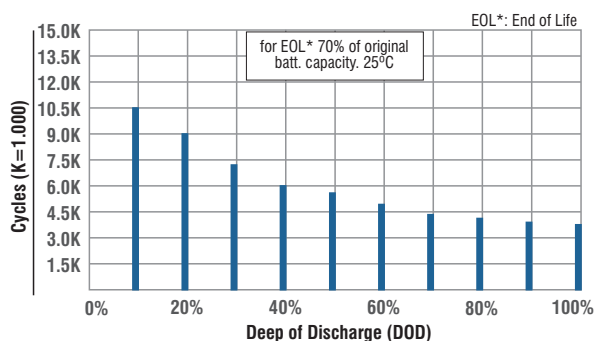

Self Discharge / Descarga en Almacén (vs Temp. °C)

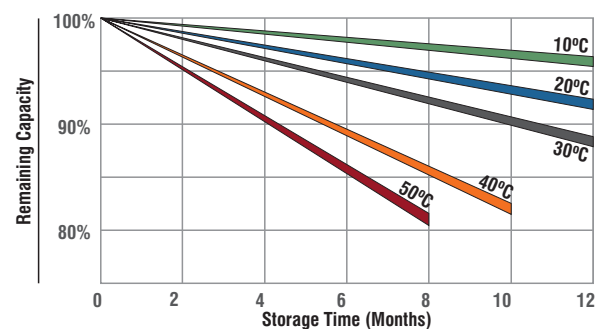


LiFePO4 - MAINTENANCE-FREE BATTERY

12.8V - 100AH (1280Wh) & 200AH (2560Wh)

Xmart
by **Integra**

BATTERY STRUCTURE / Estructura de la batería

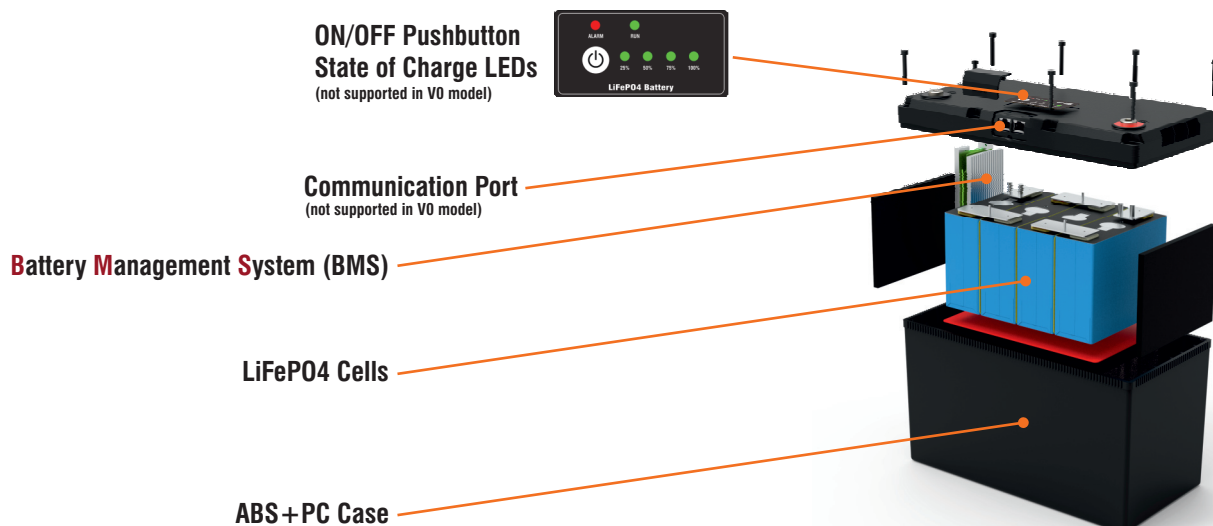

SERIAL CONNECTION / Conexión en serie



PARALLEL CONNECTION / Conexión paralela

